

### Crossfader Removal

1. Remove the two mounting screws (see Figure 1) with a #1 Phillips screwdriver.
2. Pull crossfader assembly out approximately 6 inches.
3. Unplug ribbon cable from unit (see Figure 2).
4. Place crossfader on table, in trash or you can even hang it on your wall. But Do Not place it next to your new crossfader, you may install the old one by mistake.

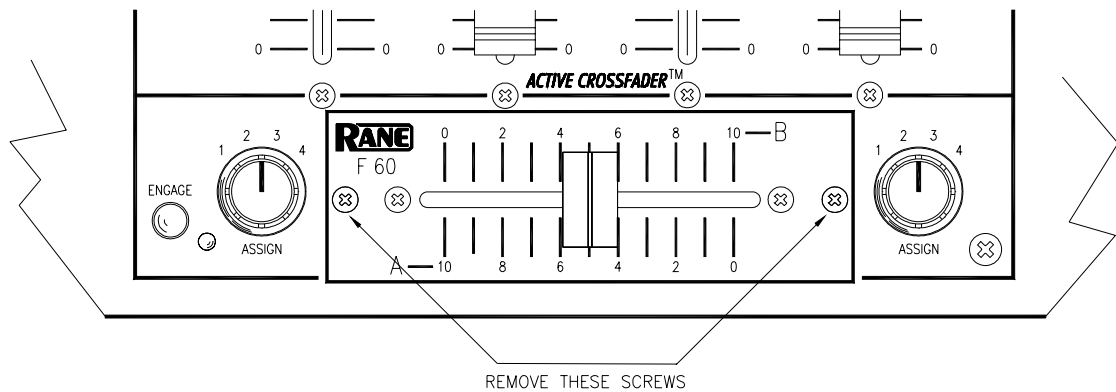


Figure 1

### Crossfader Installation

1. Set replacement crossfader in front of unit.
2. Plug ribbon cable onto unit (see Figure 2) with the red stripe on ribbon cable to the right.
3. Place crossfader assembly into unit.
4. Install the two new mounting screws, supplied with the replacement crossfader. (see figure 1).

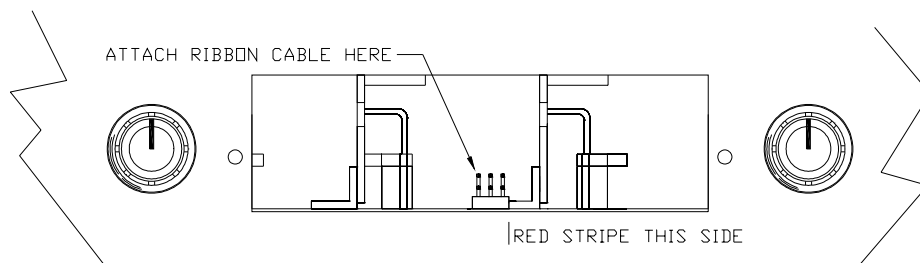


Figure 2